


**METRIC MALE 24° FLARE HEAVY TYPE
SUPER SPIRAL**

**MASCHIO METRICO SV. 24° PESANTE
TIPO SUPER SPIRAL**




CES DIN 3853-SSP

part nr. codice	hose ID			thread T	E			pipe		cut-off C	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]	[in]	[mm]
HS06030416	1/4	6,4	04	M16-1,5	0,67	17	11/16"	0,32	8	1,18	30
HS06030620	3/8	9,5	06	M20-1,5	0,87	22	7/8"	0,47	12	1,28	32,5
HS06030824	1/2	12,7	08	M24-1,5	0,95	24	15/16"	0,63	16	1,36	34,5
HS06031030	5/8	16,0	10	M30-2	1,18	30	1.3/16"	0,79	20	1,44	36,5
HS06031230	3/4	19,0	12	M30-2	1,18	30	1.3/16"	0,79	20	1,46	37
HS06031236	3/4	19,0	12	M36-2	1,42	36	1.7/16"	0,99	25	1,62	41
HS06031642	1	25,4	16	M42-2	1,81	46	1.13/16"	1,18	30	1,77	45
HS06032042	1.1/4	31,8	20	M42-2	1,81	46	1.13/16"	1,18	30	1,81	46
HS06032052	1.1/4	31,8	20	M52-2	2,17	55	2.3/16"	1,50	38	2,09	53
HS06032452	1.1/2	38,1	24	M52-2	2,17	55	2.3/16"	1,50	38	2,09	53

**METRIC FEMALE 24° FLARE HEAVY
TYPE SUPER SPIRAL**

**FEMMINA METRICA SV.24° PESANTE
TIPO SUPER SPIRAL**




DKOS DIN 3865-SSP

part nr. codice	hose ID			thread T	E			pipe		cut-off C	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]	[in]	[mm]
HS23240416	1/4	6,4	04	M16-1,5	0,75	19	3/4"	0,32	8	1,10	28
HS23240620	3/8	9,5	06	M20-1,5	0,95	24	15/16"	0,47	12	1,18	30
HS23240824	1/2	12,7	08	M24-1,5	1,18	30	1.3/16"	0,63	16	1,28	32,5
HS23241030	5/8	16,0	10	M30-2	1,42	36	1.7/16"	0,79	20	1,46	37
HS23241230	3/4	19,0	12	M30-2	1,42	36	1.7/16"	0,79	20	1,46	37
HS23241236	3/4	19,0	12	M36-2	1,81	46	1.13/16"	0,99	25	1,77	45
HS23241642	1	25,4	16	M42-2	1,97	50	2"	1,18	30	1,91	48,5
HS23242042	1.1/4	31,8	20	M42-2	1,97	50	2"	1,18	30	1,77	45
HS23242052	1.1/4	31,8	20	M52-2	2,36	60	2.3/8"	1,50	38	1,85	47
HS23242452	1.1/2	38,1	24	M52-2	2,36	60	2.3/8"	1,50	38	1,85	47

**METRIC FEMALE 24° FLARE HEAVY 90°
ELBOW TYPE SUPER SPIRAL**

**FEMMINA 90° METRICA SV.24° PESANTE
TIPO SUPER SPIRAL**

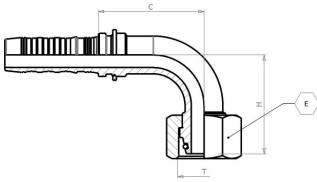


DKOS-90-SSP DIN 3865

part nr. codice	hose ID			thread T	E			pipe		cut-off C		drop H	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]	[in]	[mm]	[in]	[mm]
HS38240416	1/4	6,4	04	M16-1,5	0,75	19	3/4"	0,32	8	1,14	29	1,10	28
HS38240620	3/8	9,5	06	M20-1,5	0,95	24	15/16"	0,47	12	1,50	38	1,34	34
HS38240824	1/2	12,7	08	M24-1,5	1,18	30	1.3/16"	0,63	16	1,93	49	1,85	47
HS38241030	5/8	16,0	10	M30-2	1,42	36	1.7/16"	0,79	20	1,97	50	1,97	50
HS38241230	3/4	19,0	12	M30-2	1,42	36	1.7/16"	0,79	20	2,40	61	2,17	55
HS38241236	3/4	19,0	12	M36-2	1,81	46	1.13/16	0,99	25	2,23	56,5	2,25	57
HS38241642	1	25,4	16	M42-2	1,97	50	2"	1,18	30	3,03	77	2,56	65
HS38242042	1.1/4	31,8	20	M42-2	1,97	50	2"	1,18	30	3,43	87	3,23	82
HS38242052	1.1/4	31,8	20	M52-2	2,36	60	2.3/8"	1,50	38	3,43	87	3,39	86
HS38242452	1.1/2	38,1	24	M52-2	2,36	60	2.3/8"	1,50	38	4,53	115	3,70	94

**METRIC FEMALE 24° FLARE HEAVY 45°
ELBOW TYPE SUPER SPIRAL**

**FEMMINA 45° METRICA SV.24° PESANTE
TIPO SUPER SPIRAL**

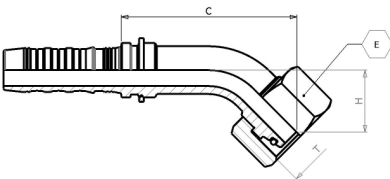

DKOS-45-SSP DIN 3865

part nr. codice	hose ID			thread T	E			pipe		cut-off C		drop H	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]	[in]	[mm]	[in]	[mm]
HS40240416	1/4	6,4	04	M16-1,5	0,75	19	3/4"	0,32	8	1,50	38	0,59	15
HS40240620	3/8	9,5	06	M20-1,5	0,95	24	15/16"	0,47	12	1,73	44	0,71	18
HS40240824	1/2	12,7	08	M24-1,5	1,18	30	1.3/16"	0,63	16	2,13	54	0,79	20
HS40241030	5/8	16,0	10	M30-2	1,42	36	1.7/16"	0,79	20	2,68	68	1,06	27
HS40241230	3/4	19,0	12	M30-2	1,42	36	1.7/16"	0,79	20	3,03	77	1,06	27
HS40241236	3/4	19,0	12	M36-2	1,81	46	1.13/16	0,99	25	3,03	77	1,14	29
HS40241642	1	25,4	16	M42-2	1,97	50	2"	1,18	30	3,47	88	1,30	33
HS40242042	1.1/4	31,8	20	M42-2	1,97	50	2"	1,18	30	4,10	104	1,85	47
HS40242052	1.1/4	31,8	20	M52-2	2,36	60	2.3/8"	1,50	38	4,10	104	1,85	47
HS40242452	1.1/2	38,1	24	M52-2	2,36	60	2.3/8"	1,50	38	4,73	120	1,97	50