



SAE 100 R7


Inner Tube : thermoplastic polyester
 Reinforcement : polyester fiber
 Cover : polyurethane, on request it is also available micro perforated
 Working Temperature : -40°C / +100°C

SAE 100 R7

Sottostrato : poliestere termoplastico
 Rinforzo : fibra poliestere
 Copertura : poliuretano, a richiesta microperforato
 Temperatura di Esercizio : -40°C / +100°C

PRO 7

part nr. codice	ID			OD		WP		BP		MBR		TW	
	[in]	[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0122131803	3/16"	4,8	03	0,39	10,0	3046	210	12183	840	1,38	35,0	0,049	0,073
0122131804	1/4"	6,4	04	0,46	11,8	2901	200	11603	800	1,97	50,0	0,060	0,090
0122131805	5/16"	8,0	05	0,56	14,3	2756	190	11022	760	2,17	55,0	0,086	0,128
0122131806	3/8"	9,7	06	0,63	16,0	2538	175	10152	700	2,96	75,0	0,104	0,155
0122131808	1/2"	13,0	08	0,80	20,3	2030	140	8122	560	3,74	95,0	0,150	0,224
0122131810	5/8"	16,0	10	0,93	23,5	1523	105	6091	420	4,93	125,0	0,186	0,277
0122131812	3/4"	19,2	12	1,04	26,5	1305	90	5221	360	5,91	150,0	0,221	0,330
0122131816	1"	25,6	16	1,28	32,5	1015	70	4061	280	7,88	200,0	0,270	0,403

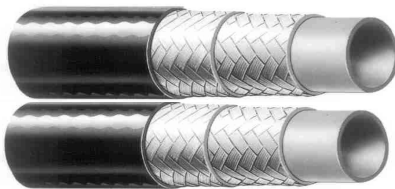

SAE 100 R7 - TWIN HOSES

Inner Tube : thermoplastic polyester
 Reinforcement : polyester fiber
 Cover : polyurethane, on request it is also available micro perforated
 Working Temperature : -40°C / +100°C

SAE 100 R7 - BINATO

Sottostrato : poliestere termoplastico
 Rinforzo : fibra poliestere
 Copertura : poliuretano, a richiesta microperforato
 Temperatura di Esercizio : -40°C / +100°C

PRO 7B

part nr. codice	ID			OD		WP		BP		MBR		TW	
	[in]	[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0122132003	3/16"	4,8	03	0,39	10,0	3046	210	12183	840	1,38	35,0	0,098	0,146
0122132004	1/4"	6,4	04	0,46	11,8	2901	200	11603	800	1,97	50,0	0,121	0,180
0122132005	5/16"	8,0	05	0,56	14,3	2756	190	11022	760	2,17	55,0	0,172	0,256
0122132006	3/8"	9,7	06	0,63	16,0	2538	175	10152	700	2,96	75,0	0,208	0,310
0122132008	1/2"	13,0	08	0,80	20,3	2030	140	8122	560	3,74	95,0	0,301	0,448
0122132010	5/8"	16,0	10	0,93	23,5	1523	105	6091	420	4,93	125,0	0,372	0,554
0122132012	3/4"	19,2	12	1,04	26,5	1305	90	5221	360	5,91	150,0	0,443	0,660
0122132016	1"	25,6	16	1,28	32,5	1015	70	4061	280	7,88	200,0	0,541	0,806



SAE 100 R18

Inner Tube : thermoplastic polyester
 Reinforcement : 2 braids in polyester fiber
 Cover : polyurethane
 Working Temperature : -40°C / +100°C

SAE 100 R18

Sottostrato : poliestere termoplastico
 Rinforzo : 2 trecce in fibra di poliestere
 Copertura : poliuretano
 Temperatura di Esercizio : -40°C / +100°C

PRO R18

part nr. codice	ID			OD		WP		BP		MBR		TW	
	[in]	[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0122131904	1/4"	6,4	04	0,50	12,7	3626	250	14503	1000	1,77	45,0	0,072	0,107
0122131905	5/16"	8,0	05	0,59	15,0	3626	250	14503	1000	2,17	55,0	0,101	0,150
0122131906	3/8"	9,7	06	0,71	18,0	3626	250	14503	1000	2,36	60,0	0,138	0,205
0122131908	1/2"	13,0	08	0,90	22,8	3336	230	13343	920	4,73	120,0	0,187	0,279