



**SAE 100 R8**


Inner Tube : thermoplastic polyester  
 Reinforcement : aramidic fiber  
 Cover : polyurethane, on request it is also available micro perforated  
 Working Temperature : -40°C / +100°C

**SAE 100 R8**

Sottostrato : poliestere termoplastico  
 Rinforzo : fibra aramidica  
 Copertura : poliuretano, a richiesta microperforato  
 Temperatura di Esercizio : -40°C / +100°C

**PRO 8**

part nr. codice	[in]	ID		OD		WP		BP		MBR		TW	
		[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0132131903	3/16"	4,8	03	0,39	10,0	5076	350	20305	1400	1,38	35,0	0,048	0,072
0132131904	1/4"	6,4	04	0,46	11,8	5076	350	20305	1400	1,97	50,0	0,058	0,086
0132131905	5/16"	8,0	05	0,56	14,3	4714	325	18854	1300	2,36	60,0	0,085	0,126
0132131906	3/8"	9,7	06	0,63	16,0	4061	280	16244	1120	3,15	80,0	0,100	0,149
0132131908	1/2"	13,0	08	0,80	20,3	3553	245	14213	980	3,74	95,0	0,151	0,225
0132131910	5/8"	16,0	10	0,93	23,5	2828	195	11313	780	4,93	125,0	0,178	0,265
0132131912	3/4"	19,2	12	1,04	26,5	2393	165	9572	660	5,91	150,0	0,242	0,360
0132131916	1"	25,6	16	1,37	34,7	2103	145	8412	580	7,88	200,0	0,339	0,505

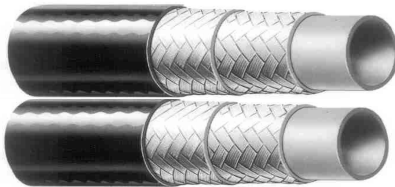

**SAE 100 R8 – TWIN HOSES**

Inner Tube : thermoplastic polyester  
 Reinforcement : aramidic fiber  
 Cover : polyurethane, on request it is also available micro perforated  
 Working Temperature : -40°C / +100°C

**SAE 100 R8 - BINATO**

Sottostrato : poliestere termoplastico  
 Rinforzo : fibra aramidica  
 Copertura : poliuretano, a richiesta microperforato  
 Temperatura di Esercizio : -40°C / +100°C

**PRO 8B**

part nr. codice	[in]	ID		OD		WP		BP		MBR		TW	
		[mm]	size	[in]	[mm]	[psi]	[bar]	[psi]	[bar]	[in]	[mm]	[lb/ft]	[Kg/mt]
0132132103	3/16"	4,8	03	0,39	10,0	5076	350	20305	1400	1,38	35,0	0,097	0,144
0132132104	1/4"	6,4	04	0,46	11,8	5076	350	20305	1400	1,97	50,0	0,115	0,172
0132132105	5/16"	8,0	05	0,56	14,3	4714	325	18854	1300	2,36	60,0	0,169	0,252
0132132106	3/8"	9,7	06	0,63	16,0	4061	280	16244	1120	3,15	80,0	0,200	0,298
0132132108	1/2"	13,0	08	0,80	20,3	3553	245	14213	980	3,74	95,0	0,302	0,450
0132132110	5/8"	16,0	10	0,93	23,5	2828	195	11313	780	4,93	125,0	0,356	0,530
0132132112	3/4"	19,2	12	1,04	26,5	2393	165	9572	660	5,91	150,0	0,483	0,720
0132132116	1"	25,6	16	1,37	34,7	2103	145	8412	580	7,88	200,0	0,678	1,010