


BSPP MALE 60° FLARE TYPE SUPER SPIRAL

MASCHIO BSPP SV. 60° TIPO SUPER SPIRAL

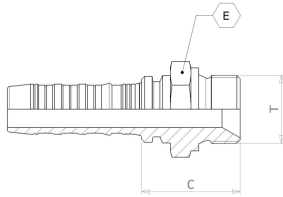


AGR-SSP

part nr. codice	hose ID			thread	E			cut-off C	
	[in]	[mm]	size	T	[in]	[mm]	key	[in]	[mm]
HS02000413	1/4	6,4	04	1/4-19	0,75	19	3/4"	1,18	30
HS02000617	3/8	9,5	06	3/8-19	0,87	22	7/8"	1,26	32
HS02000821	1/2	12,7	08	1/2-14	1,06	27	1.1/16"	1,40	35,5
HS02001023	5/8	16,0	10	5/8-14	1,18	30	1.3/16"	1,48	37,5
HS02001227	3/4	19,0	12	3/4-14	1,26	32	1.1/4"	1,50	38
HS02001633	1	25,4	16	1-11	1,62	41	1.5/8"	1,69	43
HS02002042	1.1/4	31,8	20	1.1/4-11	1,97	50	2"	1,89	48
HS02002448	1.1/2	38,1	24	1.1/2-11	2,17	55	2.3/16"	1,93	49
HS02003251	2	50,8	32	2-11	2,76	70	2.3/4"	2,23	56,5

BSPT MALE 60° FLARE TYPE SUPER SPIRAL

MASCHIO BSPT SV. 60° TIPO SUPER SPIRAL




AGR-K-SSP

part nr. codice	hose ID			thread	E			cut-off C	
	[in]	[mm]	size	T	[in]	[mm]	key	[in]	[mm]
HS02010413	1/4	6,4	04	1/4-19	0,59	15	5/8"	1,22	31
HS02010617	3/8	9,5	06	3/8-19	0,75	19	3/4"	1,24	31,5
HS02010821	1/2	12,7	08	1/2-14	0,87	22	7/8"	1,44	36,5
HS02011023	5/8	16,0	10	5/8-14	0,95	24	15/16"	1,48	37,5
HS02011227	3/4	19,0	12	3/4-14	1,06	27	1.1/16"	1,56	39,5
HS02011633	1	25,4	16	1-11	1,42	36	1.7/16"	1,85	47
HS02012042	1.1/4	31,8	20	1.1/4-11	1,81	46	1.13/16"	1,97	50
HS02012448	1.1/2	38,1	24	1.1/2-11	1,97	50	2"	2,05	52
HS02013251	2	50,8	32	2-11	2,56	65	2.9/16"	2,29	58

BSP FEMALE 60° FLARE TYPE SUPER SPIRAL

FEMMINA BSP SV. 60° TIPO SUPER SPIRAL

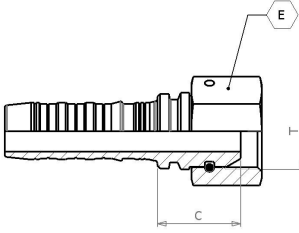


DKR-SSP

part nr. codice	hose ID			thread T	E			cut-off C	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]
HS16400413	1/4	6,4	04	1/4-19	0,75	19	3/4"	0,87	22
HS16400617	3/8	9,5	06	3/8-19	0,87	22	7/8"	0,93	23,5
HS16400821	1/2	12,7	08	1/2-14	1,06	27	1.1/16"	0,99	25
HS16401023	5/8	16,0	10	5/8-14	1,18	30	1.3/16"	0,99	25
HS16401227	3/4	19,0	12	3/4-14	1,26	32	1.1/4"	1,12	28,5
HS16401633	1	25,4	16	1-11	1,50	38	1.1/2"	1,24	31,5
HS16402042	1.1/4	31,8	20	1.1/4-11	1,97	50	2"	1,38	35
HS16402448	1.1/2	38,1	24	1.1/2-11	2,17	55	2.3/16"	1,46	37
HS16403251	2	50,8	32	2-11	2,76	70	2.3/4"	1,34	34

BSP FEMALE 60° FLARE 90° ELBOW TYPE SUPER SPIRAL

FEMMINA 90° BSP SV. 60° TIPO SUPER SPIRAL

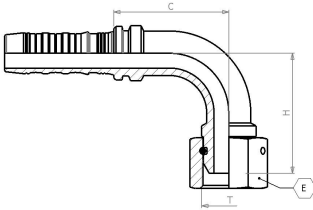


DKR-90-SSP

part nr. codice	hose ID			thread T	E			cut-off C		drop H	
	[in]	[mm]	size		[in]	[mm]	key	[in]	[mm]	[in]	[mm]
HS27400413	1/4	6,4	04	1/4-19	0,75	19	3/4"	1,10	28	1,10	28
HS27400617	3/8	9,5	06	3/8-19	0,87	22	7/8"	1,44	36,5	1,38	35
HS27400821	1/2	12,7	08	1/2-14	1,06	27	1.1/16"	1,65	42	1,58	40
HS27401023	5/8	16,0	10	5/8-14	1,18	30	1.3/16"	1,89	48	1,85	47
HS27401227	3/4	19,0	12	3/4-14	1,26	32	1.1/4"	2,17	55	2,25	57
HS27401633	1	25,4	16	1-11	1,50	38	1.1/2"	2,96	75	2,96	75
HS27402042	1.1/4	31,8	20	1.1/4-11	1,97	50	2"	3,74	95	3,11	79
HS27402448	1.1/2	38,1	24	1.1/2-11	2,17	55	2.3/16"	4,14	105	3,74	95
HS27403251	2	50,8	32	2-11	2,76	70	2.3/4"	5,32	135	5,20	132

**BSP FEMALE 60° FLARE 45° ELBOW TYPE
SUPER SPIRAL**

**FEMMINA 45° BSP SV. 60° TIPO SUPER
SPIRAL**

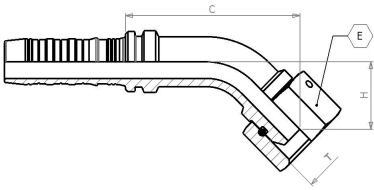

DKR-45-SSP

part nr. codice	hose ID		size	thread T	E		key	cut-off C		drop H	
	[in]	[mm]			[in]	[mm]		[in]	[mm]	[in]	[mm]
HS28400413	1/4	6,4	04	1/4-19	0,75	19	3/4"	1,54	39	0,63	16
HS28400617	3/8	9,5	06	3/8-19	0,87	22	7/8"	1,85	47	0,75	19
HS28400821	1/2	12,7	08	1/2-14	1,06	27	1.1/16"	2,17	55	0,91	23
HS28401023	5/8	16,0	10	5/8-14	1,18	30	1.3/16"	2,44	62	0,95	24
HS28401227	3/4	19,0	12	3/4-14	1,26	32	1.1/4"	2,96	75	1,14	29
HS28401633	1	25,4	16	1-11	1,50	38	1.1/2"	3,66	93	1,50	38
HS28402042	1.1/4	31,8	20	1.1/4-11	1,97	50	2"	4,14	105	1,93	49
HS28402448	1.1/2	38,1	24	1.1/2-11	2,17	55	2.3/16"	4,85	123	2,32	59
HS28403251	2	50,8	32	2-11	2,76	70	2.3/4"	5,71	145	2,68	68